

- 1 3841289 BELT ASM
- 2 9776227 RETRACTOR (OUTBOARD BELTS ONLY)
- ⚠ 3 3856031 BOLT ASM
- 4 3841316 SEALER
- 5 INSTALL BELT WITH BUCKLE END AT INBOARD SIDE
- 6 LATCH BELTS TOGETHER FOR SHIPPING TO PREVENT SOILING & DAMAGE TO BELT FABRIC





NOTE INSTALL BOOT OVER BRACKET THEN LIFT BOOT PARTIALLY TO EXPOSE HOLE FOR ATTACHMENT

NOTE BRACKET MUST BE FREE TO ROTATE WHEN BOLT IS FULLY TIGHTENED

NOTE BOOT LIP MUST INSTALL OVER BRACKET

NOTE CRIMP TABS SECURELY AGAINST BELT WEBBING

CAUTION DO NOT REMOVE RETAINER CLIP UNTIL RETRACTOR IS SECURELY FASTENED TO BELT.

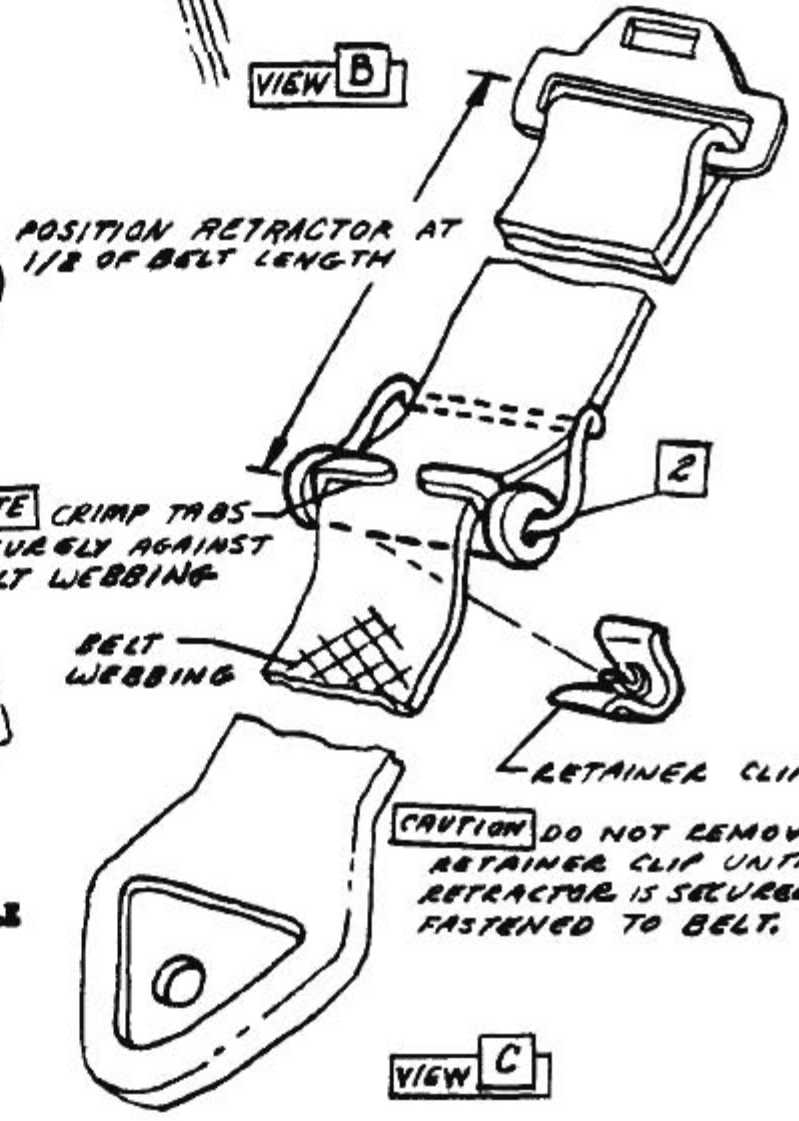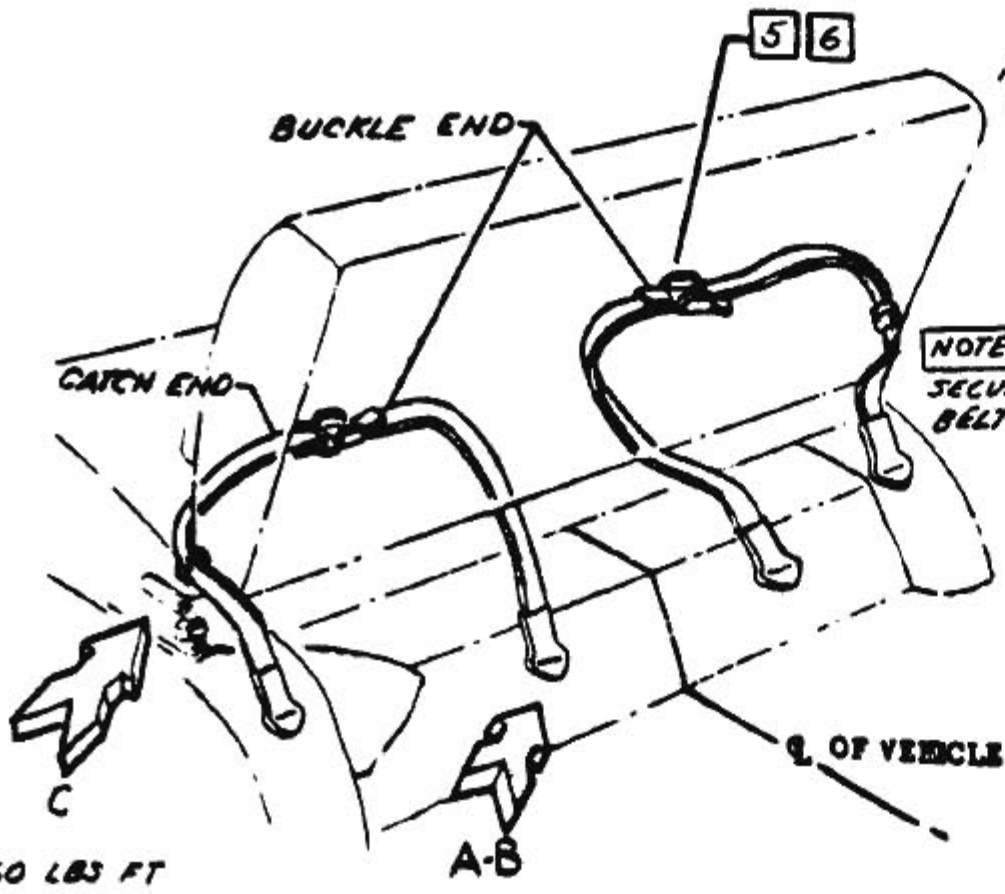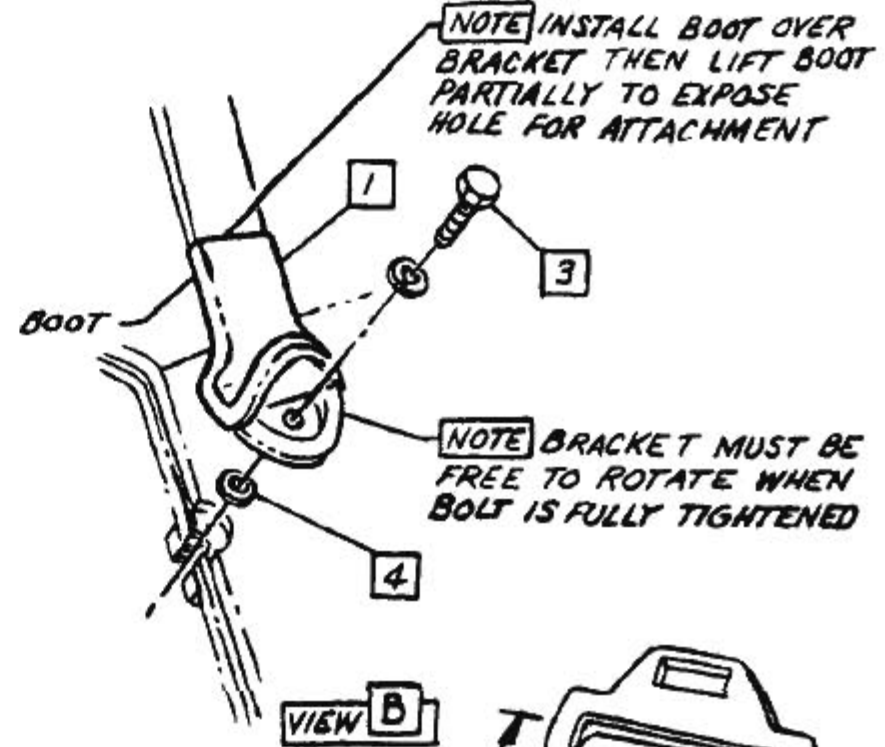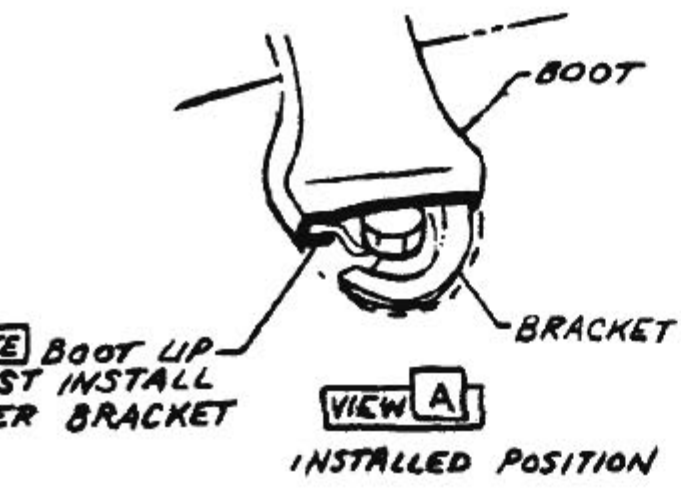

⚠ 40-60 LBS FT
▲
▲
▲

CHEVROLET MOTOR DIVISION				GENERAL MOTORS CORPORATION			
DATE	SYM.	REVISION RECORD	ECR	DR.	CK.		
8-10-64	1	REDRAWN & REVISED	60431	LM	TD	1964V-310	
REL. 10-11-63 CK/RM MODELS: 1206						SCT.	SHEET
ECR 58372						A 49	1.00
REF. 4-70830 XAB						TITLE: SEAT BELT & RETRACTOR INSTALLATION	